

WWT JetGuide™

High Velocity Failsafe Jetting Shoe




Specifications

JetGuide Model	450	550	700	758	958	1075	1175	1338	1400	1600	1800
Casing Size (inches)	4-1/2	5-1/2	7	7-5/8	9-5/8	10-3/4	11-3/4	13-3/8	14	16	18
Max OD (inches)	5-3/8	6-1/4	8-1/4	8-3/4	11-1/4	11-3/4	12-3/4	14-1/4	14-1/4	16-1/4	18-1/8
Minimum TFA* (in ²)	2.1	2.1	5.1	5.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1

*TFA in. With jetting feature TFA out is reduced until opening centerline at predetermined flow rate.

Features and Benefits

- **Effective**
 - Wash through cuttings with 30X the force of other guide shoes.
 - Available in standard and eccentric models.
- **Safe**
 - Converts to full-open center bore for cementing or if jets are plugged.
- **Efficient**
 - Easily drilled out. No metal in drill out path.
 - Much lower cost than reamer shoes, but can be just as effective in many cases.
- **Modular.**
 - Increases the effectiveness of the WWT FlexShoe, or can be used as stand-alone product.
 - Float installed above shoe.

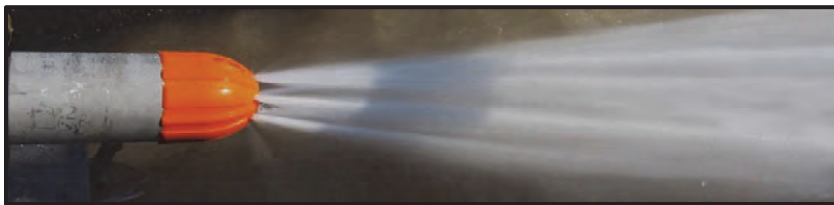

WWT
International

See how it works at
www.wwtinternational.com

Revised 1/3/18

©2016 WWT North America Holding Inc. All rights reserved. WWT FLX is a trademark of WWT North America Holdings Inc. Specifications may change without notice.