


# WWT 312 Milling Tractor™

Enables CT milling of frac plugs  
that existing technologies cannot reach

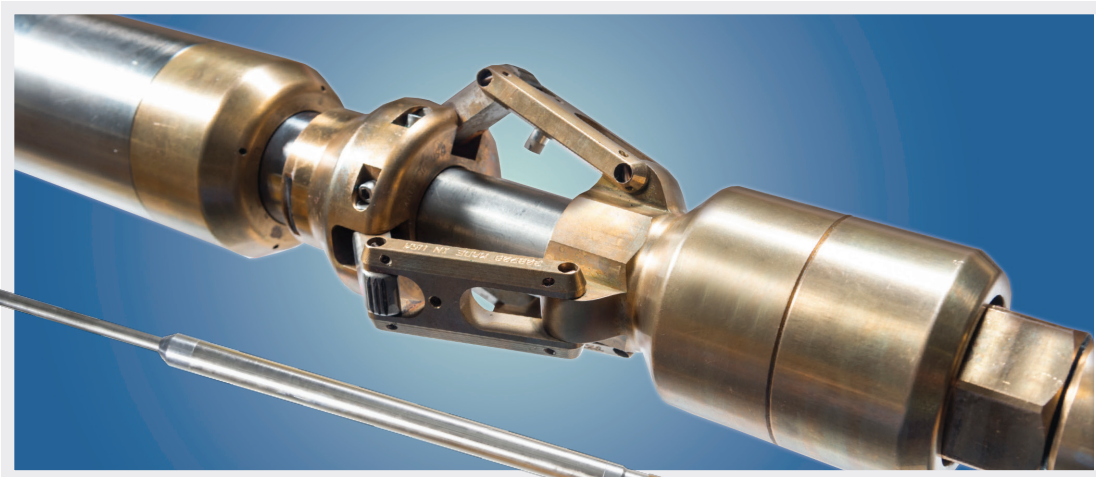

- Incorporates proven **WWT Tractor™** technology gained from nearly 20 years of downhole experience.
- Positive grip provided by the WWT Casing Link Gripper™.
- Features a short, easy-to-rig-up design that reliably keeps weight-on-bit, ensuring consistent plug drilling operations.
- Operates dependably in wellbores with excessive debris, high vibration and recirculated fluid.
- Compatible with all commonly used downhole mud motors.

**WWT International** supports your operations from start to finish with full-service onsite mobilization and support 24/7. To find out more about WWT 312 Milling Tractors™, visit our web site.

Outside Diameter	3.125 in.
Inside Diameter	0.688 in
Pull Capacity	6,250 lbs.
Length	16 ft.
Weight	225 lbs.
Maximum Tractor Speed	17 ft./min.
Maximum Torque	2,400 lb.-ft.
Supported Casing Diameters	4-1/2" to 5-1/2" ID
Maximum Dogleg Severity	10°/100 ft.
Maximum Flow Rate	4.0 BPM
Maximum Temperature	320° F
Materials of Construction	Steel, Inconel and Beryllium Copper

Houston, USA • Al-Khobar, Saudi Arabia • Quito, Ecuador • Aberdeen, Scotland • Dubai, UAE • Rio De Janeiro, Brazil

[www.wwtinternational.com](http://www.wwtinternational.com)

